





Low VOC Basecoat Converter



Paint a Multicolor Sign in Hours Rather than Days

Matthews Paint (MP) Low VOC Basecoat Converter allows for quick application of multicolor layouts, provides improved metallic control, and exhibits the highest possible gloss and distinctiveness of image.

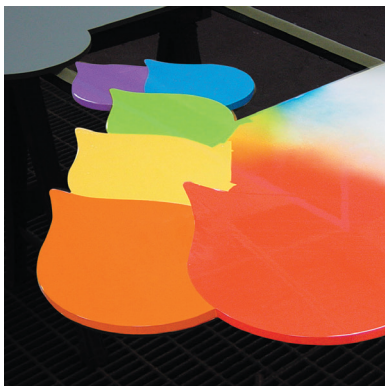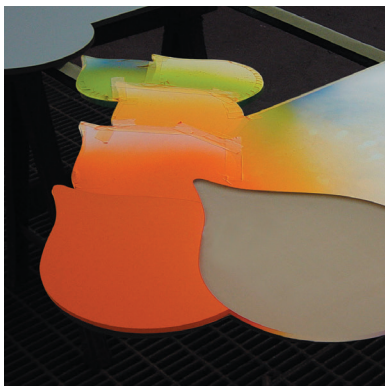

Features & Benefits:

- Converts MP conventional and low VOC acrylic polyurethane colors into a basecoat/clearcoat system
- Allows for quick application of multicolor layouts
- Minimizes need for additional bank of toners
- Low VOC is better for the environment
- Faster tape and vinyl application times
- Improved metallic control
- Can be used with solid and metallic products
- Eliminates complicated mixing procedures
- Simple and easy mix ratio
- Covers large surface applications with ease
- Can be applied over any Matthews primer
- Provides a more consistent finish
- Exhibits highest gloss and distinctiveness of image
- Uses existing MP toners with one additive

Note: MP basecoat converter must be topcoated with a MP clear and cannot be used with the MAP Ultra Low VOC product line.



The Complete Matthews Paint System:



Learn More:

760 Pittsburgh Drive • Delaware, OH 43015
Toll Free: 800.323.6593 • Fax: 800.947.0377
www.matthewspaint.com





Low VOC Basecoat Converter



Dry Times for 287103SP/01 Basecoat Converter

Accelerator	Dust Free	Set to Touch	Tape Time	Vinyl Application (2-3 mils)	Dry to Clearcoat
Without Accelerator	10-15 minutes	15-20 minutes	1.5 hours	4 hours	15-45 minutes
287437SP/08	10-15 minutes	15-20 minutes	30-40 minutes	2 hours	15-45 minutes

Recoating: Converted color or clear should be clearcoated within 12 hours. Otherwise, lightly dry scuff with 320 - 400g by hand/machine or wet sand with 600g, then reclean before reapplying basecoat and clearing.

Note: Actual times may vary based on application variables, temperature, type of primer used, etc.